# Proximity Inductive Sensors Increased Operating Distance, Nickel-Plated Brass Housing - Types ICB, M18





- Sensing distance: 12 to 20 mm
- Quasi-flush or non-flush mountable
- Short or long body versions
- Rated operational voltage (U<sub>b</sub>): 10 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open or Normally closed
- LED indication for output ON, short-circuit and overload
- Protection: reverse polarity, short circuit, transients
- Cable or M12 plug versions
- According to IEC 60947-5-2
- Setup indicator
- Laser engraved on front cap, permanently legible
- CSA certified for Hazardous Locations



### **Product Description**

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where very long operating distance is requested.

Output is open collector NPN or PNP transistors. Less machine downtime thanks to lower risk of mechanical damage.

Ordering Key	ICB	31	8S	30	)F1	2N	OM 1
Type						\ 	
Housing style							
Housing material							
Housing size							
Housing length							
Thread length							
Detection principle							
Sensing distance						]	
A							
Output configuration —							_
Connection							

### **Type Selection**

Connec- tion	Body style	Rated operating distance S <sub>n</sub>	Ordering no. NPN, Normally open	Ordering no. PNP, Normally open	Ordering no. NPN, Normally closed	Ordering no. PNP, Normally closed
Cable	Short	12 mm <sup>1)</sup>	ICB18S30F12N0	ICB18S30F12P0	ICB18S30F12NC	ICB18S30F12PC
Cable	Short	20 mm 2)	ICB18S30N20N0	ICB18S30N20P0	ICB18S30N20NC	ICB18S30N20PC
Plug	Short	12 mm 1)	ICB18S30F12N0M1	ICB18S30F12P0M1	ICB18S30F12NCM1	ICB18S30F12PCM1
Plug	Short	20 mm 2)	ICB18S30N20N0M1	ICB18S30N20P0M1	ICB18S30N20NCM1	ICB18S30N20PCM1
Cable	Long	12 mm 1)	ICB18L50F12N0	ICB18L50F12P0	ICB18L50F12NC	ICB18L50F12PC
Cable	Long	20 mm 2)	ICB18L50N20N0	ICB18L50N20P0	ICB18L50N20NC	ICB18L50N20PC
Plug	Long	12 mm 1)	ICB18L50F12N0M1	ICB18L50F12P0M1	ICB18L50F12NCM1	ICB18L50F12PCM1
Plug	Long	20mm 2)	ICB18L50N20N0M1	ICB18L50N20P0M1	ICB18L50N20NCM1	ICB18L50N20PCM1

<sup>1)</sup> For quasi-flush mounting in metal

## **Specifications**

$ \begin{array}{llllllllllllllllllllllllllllllllllll$		
tutput current (I <sub>e</sub> ) $\leq 200$ mA @ 50°C (≤ 150 mA @ 50-70°C) $\leq 50$ μA $\leq 50$ μA $\leq 50$ μA $\leq 15$ mA $< 15$ mA $<$	Rated operational voltage ( $U_b$ )	10 to 36 VDC (ripple incl.)
$(\leq 150 \text{ mA} @ 50\text{-}70^{\circ}\text{C})$ FF-state current (I <sub>r</sub> ) $\leq 50 \text{ µA}$ o load supply current (I <sub>o</sub> ) $\leq 15 \text{ mA}$ oltage drop (U <sub>d</sub> ) Max. 2.5 VDC @ 200 mA rotection Reverse polarity, short-circuit, transients oltage transient 1 kV/0.5 J ower ON delay (t <sub>v</sub> ) $\leq 20 \text{ ms}$	Ripple	≤ 10%
o load supply current ( $I_o$ ) $\leq 15$ mA  oltage drop ( $U_d$ ) Max. 2.5 VDC @ 200 mA  rotection Reverse polarity, short-circuit, transients  oltage transient 1 kV/0.5 J  ower ON delay ( $t_v$ ) $\leq 20$ ms	Output current (I <sub>e</sub> )	
$\begin{array}{ll} \text{Doltage drop (U_d)} & \text{Max. 2.5 VDC @ 200 mA} \\ \text{rotection} & \text{Reverse polarity,} \\ \text{short-circuit, transients} \\ \text{Doltage transient} & 1 \text{ kV/0.5 J} \\ \text{ower ON delay (t_v)} & \leq 20 \text{ ms} \\ \end{array}$	OFF-state current (I <sub>r</sub> )	≤ 50 µA
rotection  Reverse polarity, short-circuit, transients  oltage transient  1 kV/0.5 J  ower ON delay (t <sub>v</sub> )  ≤ 20 ms	No load supply current (I <sub>o</sub> )	≤ 15 mA
short-circuit, transients  oltage transient 1 kV/0.5 J  ower ON delay ( $t_v$ ) $\leq$ 20 ms	Voltage drop (U₀)	Max. 2.5 VDC @ 200 mA
ower ON delay (t₀) ≤ 20 ms	Protection	1 37
	Voltage transient	1 kV/0.5 J
perating frequency (f) ≤ 1500 Hz	Power ON delay (t <sub>v</sub> )	≤ 20 ms
	Operating frequency (f)	≤ 1500 Hz

Indication for output ON NO version NC version	Activated LED, yellow Target present Target not present
Indication for short circuit/ overload	LED blinking (f = 2 Hz)
Assured operating sensing distance (S <sub>a</sub> )	$0 \leq S_a \leq 0.81 \ x \ S_n$
Effective operating distance (S <sub>r</sub> )	$0.9 \times S_n \le S_r \le 1.1 \times S_n$
Usable operating distance (S <sub>u</sub> )	$0.9 \times S_r \le S_u \le 1.1 \times S_r$
Repeat accuracy (R)	≤ 10%
Differential travel (H) (Hysteresis)	1 to 20% of sensing dist.

<sup>&</sup>lt;sup>2)</sup> For non-flush mounting in metal





# **Specifications (cont.)**


<u> </u>	•	
Ambient temperature Operating Storage	-25° to +70°C (-13° to +158°F) -30° to +80°C (-22° to +176°F)	Approvals
Shock and vibration	IEC 60947-5-2/7.4	
<b>Housing material</b> Body Front	Nickel-plated brass Grey thermoplastic polyester	Note: The (version evaluated
Connection Cable Plug	Ø4.1 x 2 m, 3 x 0.25 mm <sup>2</sup> , grey PVC, oil proof M12 x 1	the termin be determ application
Degree of protection	IP 67	
Weight (cable/nuts included) Cable Plug	Max. 150 g Max. 80 g	
Dimensions	See diagrams below	EMC prot
Tightening torque Distance from sensing face from 0 mm to 9 mm > 9 mm	15 Nm 25 Nm	IEC 6100 IEC 6100 IEC 6100
Setup function  NO version  LED flashing (f=0.67 Hz)  LED lights continuously  NC version  LED flashing (f=0.67 Hz)  LED OFF	$\begin{array}{l} 0.8 \; S_{n} < S_{r} \leq S_{n} \\ 0 \leq S_{r} \leq 0.8 \; S_{n} \; (*) \\ \\ 0.8 \; S_{n} < S_{r} \leq S_{n} \\ 0 \leq S_{r} \leq 0.8 \; S_{n} \; (*) \\ (*): \; safer \; installation \end{array}$	MTTF <sub>d</sub>


Approvals	c <b>UL</b> us	(UL508)
Note: The termina (versionM1) wa evaluated. The su the terminal conn be determined in application.	s not litability of ector should	As Process Control Equipment for Hazardous Locations Class I, Division 2, Groups A, B, C and D T5 up to 150mA, T4A for a load current > 150mA and up to 200 mA, Enclosure Type 4. Ambient temperature Ta: -25° to +60°C CCC is not required for
		products with a maximum operating voltage of ≤ 36 V
EMC protection		According to IEC 60947-5-2
IEC 61000-4-2 (	ESD)	8 KV air discharge, 4 KV contact discharge
IEC 61000-4-3		3 V/m
IEC 61000-4-4		2 kV
IEC 61000-4-6		3 V
IEC 61000-4-8		30 A/m
MTTF <sub>d</sub>		850 years @ 50°C (122°F)

## **Dimensions (mm)**

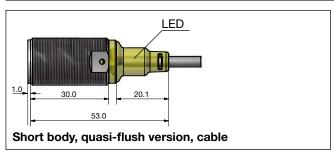

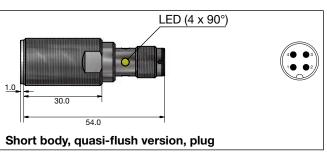


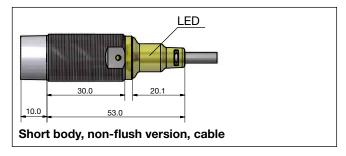


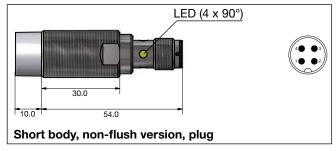





## **Dimensions (mm) (cont.)**

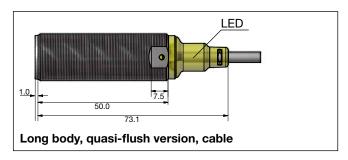

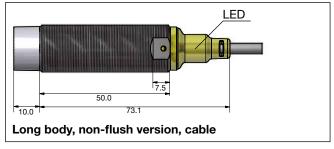

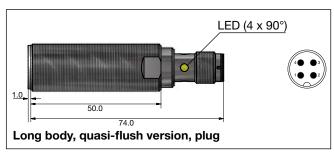


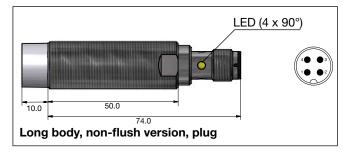


#### Installation

Quasi-flush mountable proximity switches, when installed in damping material, must be according to Picture 1A.


Non-flush mountable proximity switches, when installed in damping material, must be according to Picture 1B.

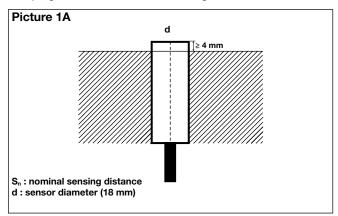


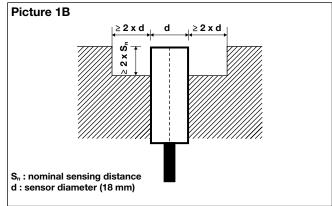

Quasi-flush mountable proximity switches, when installed together in damping material, must be according to Picture

Non-flush mountable proximity switches, when installed together in damping material, must be according to Picture 2B.

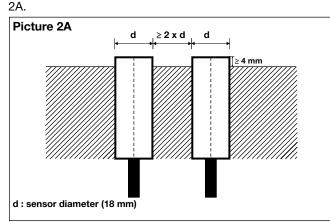


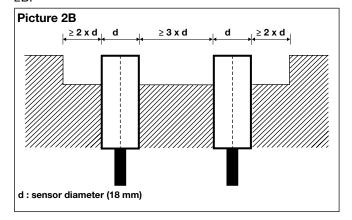





#### Installation


For sensors installed opposite each other, a minimum space of  $6 \times S_n$  (the nominal sensing distance) must be observed (See Picture 3).

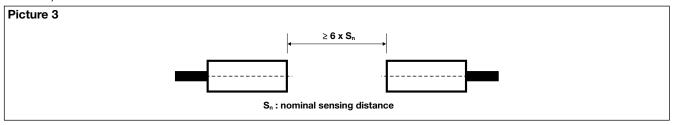


### **Wiring Diagram**










#### **Reduction Factors**

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

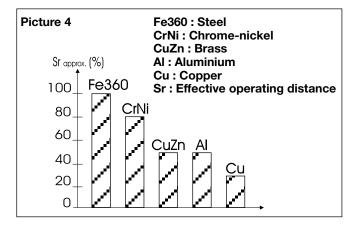

## **Delivery Contents**

- Inductive proximity switch ICB.
- 2 nuts NPB
- 2 washers
- Packaging: plastic bag

## **Accessories for Plug Versions**

	PVC	PUR
3-wire angled connector, 2 m cable	CONB13NF-A2	CONB13NF-A2P
3-wire angled connector, 5 m cable	CONB13NF-A5	CONB13NF-A5P
3-wire angled connector, 10 m cable	CONB13NF-A10	CONB13NF-A10P
3-wire angled connector, 15 m cable	CONB13NF-A15	CONB13NF-A15P
3-wire straight connector, 2 m cable	CONB13NF-S2	CONB13NF-S2P
3-wire straight connector, 5 m cable	CONB13NF-S5	CONB13NF-S5P
3-wire straight connector, 10 m cable	CONB13NF-S10	CONB13NF-S10P
3-wire straight connector, 15 m cable	CONB13NF-S15	CONB13NF-S15P

For any additional information or different options, please refer to the "General Accessories - Connector Cables -Type CONB1..." datasheets.